

PLAN ON

Gatorshield[®] tubing for trailer construction



Frame



Tongue Tube



Axle



Winch




Guide Tube

1.800.882.5543 www.alliedtube.com

Flo-Coat, Gatorshield and Tyco are either registered trademarks or trademarks of Tyco and/or its affiliates in the United States and/or other countries. All other brand names, product names, or trademarks belong to their respective owners.

 **allied**
TUBE & CONDUIT

Why specify Allied Gatorshield® tubing for trailer construction?

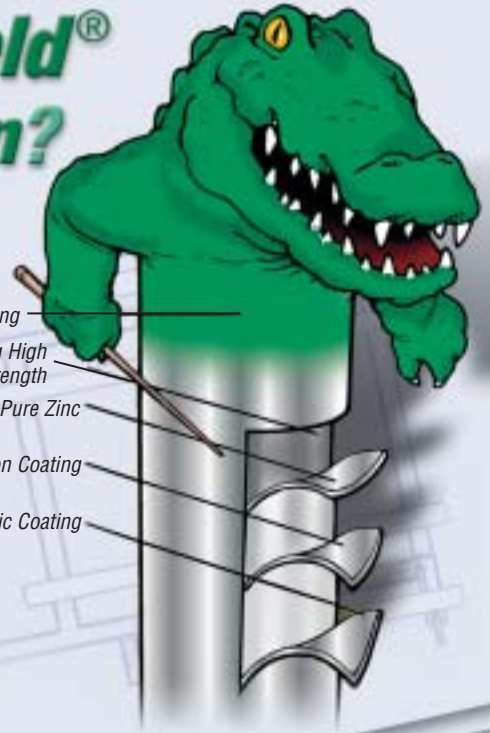

PRODUCT BENEFITS:

- Superior strength 50,000 minimum PSI Yield/55,000 minimum PSI Tensile
- Superior corrosion resistance with in-line hot-dip galvanizing process
- Excellent match to any aluminum trailer frame

TIME AND COST SAVING BENEFITS FOR AXLE AND TONGUE TUBE:

- Eliminates need to paint or powder coat after welding; no production line back-ups
- Eliminates expense and labor of adding caps to protect spindles from hot dipping or painting
- Organic topcoat acts as a primer for easy painting

UNIQUE, IN-LINE FLO-COAT® PROCESS:

- Interior Corrosion Resistant Coating
- Cold-Formed Steel Providing High Yield/High Tensile Strength
- 99.99% Pure Zinc
- Conversion Coating
- Clear Organic Coating

SALT SPRAY TESTS:

(Number of hours until first sign of red rust)

192

Pregalvanized
G-60

480

Pregalvanized
G-90

576

Hot-Dip Schedule
40 Pipe

744

Competitive
Triple-Coat Product

840

Allied Zinc
Flo-Coat® Tubing

2016

Allied
Gatorshield® Tubing

Tests conducted by Scientific Control Labs. Test results available upon request.

CORROSION RESISTANCE

Allied's galvanized steel tubing receives a triple-layer of corrosion protection. First, 99.99% pure zinc bonds to the tube, and is followed by a conversion coating. The third coating is a clear organic topcoat which "seals" the surface. The result is a smooth, shiny end product that is unmatched in terms of strength and durability.

SIZE RANGE

Round: 1/2" - 5", 22 ga to 1/4" wall thickness
 Square: 5/8" to 4", 20 ga to 1/4" wall thickness
 Rectangle: 5/8" x 1 1/8" to 3" x 4", 20 ga to 1/4" wall thickness
 Oval: 1" x 1/2" to 3 x 5.3", 20 ga to 7 ga

Distributed by:

tyco
 Electrical &
 Metal Products

16100 S. Lathrop Ave.
 Harvey, IL 60462
 Telephone: 1.800.882.5543
 www.alliedtube.com